














Bootstrap 4 Classes List v4.1.0





Complete list of all Bootstrap 4 classes with description, examples, and links to documentation.






Class Name	Preview	Description	Category
<code>.align-*</code>		A set of utility classes that are equivalent to writing the CSS property <code>vertical-align:middle</code> ; You can use this on inline and table cell elements. <code>.align-(baseline, top, middle, bottom)</code>	Utility
<code>.align-content-*</code>		Added to the parent flexbox container to determine how the elements are aligned horizontally. <code>.align-content-(start (browser default), end, center, between, around, or stretch)</code>	Utility
<code>.align-items-*</code>		Class added to flexbox child items to specify if it should align towards the top or bottom of the container (start, end)	Utility
<code>.align-self-*</code>		Used on flexbox items to align them vertically in relation to the parent container. If columns are used the items will align vertically. (start, end, center, baseline, or stretch (browser default))	Utility
<code>.align-text-*</code>		A set of utility classes that are equivalent to writing the CSS property <code>vertical-align:text-bottom</code> ; You can use this on inline and table cell elements. <code>.align-text-(top, bottom)</code>	Utility
<code>.badge-*</code>		Used for labels and counters in applications. <code>.badge-(light, dark, primary, secondary, transparent, white, warning, success, info, danger)</code>	Badge
<code>.bg-*</code>		Background color utility classes: <code>.bg-(light, dark, primary, secondary, transparent, white, warning, success, info, danger)</code>	Utilities
<code>.border-*</code>		A versatile border utility class that lets you add/remove borders on a side or change a border color. <code>.border-(light, dark, primary, secondary, transparent, white, warning, success, info, danger, 0, top-0, right-0, bottom-0, left-0, top, right, bottom, left)</code>	Utility
<code>.btn-outline-*</code>		A button variation to have outlined buttons instead of a solid background. <code>.btn-outline-(light, dark, primary,</code>	Buttons





Class Name	Preview	Description	Category
		secondary, transparent, white, warning, success, info, danger)	
.carousel-control-*		When you have an image carousel with pagination you will use this class on the previous and next anchor links. <code>.carousel-control-(prev, next)</code>	Carousel
.carousel-fade	n/a	Animates the slide transition with a crossfade instead of a slide	Utility
.col		Flexbox items are automatically equal width so this class is used when you want your columns to be equal width and then go 100% on the xs breakpoint.	Grid
.col-*		This class is used for grid columns to determine the column width and the breakpoint you would like it to be active. The classes work from the breakpoint you set and everything larger. <code>.col-(sm, md, lg, xl)-(1-12)</code>	Grid
.custom-range		Changes the default styling of a form input range	Forms
.d-flex	n/a	Sets the element to have have the style property <code>display:flex;</code>	Utility
.d-none	n/a	Sets the element to have have the style property <code>display:none;</code>	Utility
.d-*-*	n/a	A responsive display utility class that lets you specify when a display property is applied to the element. <code>.d-(sm, md, lg, xl)-(none, inline, inline-block, block, table, table-cell, table-row, flex, inline-flex)</code>	Utility
.d-print-*	n/a	Changes the display of elements when you print the document. <code>.d-print-(flex, inline-flex, table, table-cell, table-row)</code>	Utility
.fixed-*	n/a	This class makes an element fixed to the top/bottom of the browser window. Here is what the CSS ruleset looks like. <code>.fixed-bottom {position: fixed;right: 0;bottom: 0;left: 0;z-index: 1030;}</code>	Utility
.flex-*-*	n/a	Change the flexbox items layout, alignment, or size. <code>.flex-(sm, md, lg, xl)-(row, row-reverse, column)</code>	Utility
.flex-fill-*	n/a	Add to all sibling elements you would like to force into equal widths and fill all available horizontal space. <code>.flex-fill-(sm, md, lg, xl)</code>	Utility
.flex-(grow shrink)-*	n/a	Forces an element to grow or shrink to use more or less of the space available <code>.flex-(grow, shrink)-(0, 1)</code>	Utility




Class Name	Preview	Description	Category
<code>.float-*-*</code>	n/a	Responsive utility to float an element. <code>.float-(sm, md, lg, xl)-(none, left, right)</code>	Utility
<code>.form-control-plaintext</code>	 A form with an email input field and a password input field. The email field is labeled 'Email' and the password field is labeled 'Password'.	Use the <code>.form-control-plaintext</code> class to remove the default form field styling and preserve the correct margin and padding.	Forms
<code>.form-row</code>	 A form with two input fields side-by-side. The first field is labeled 'First name' and the second field is labeled 'Last name'.	Works similar to a grid <code>.row</code> but is more compact to make the form look more uniform	Forms
<code>.h-*</code>	 A series of colored bars representing different height percentages: 25%, 50%, 78%, 100%, and auto.	Height utility class that makes the element a percentage height of its parent element. <code>h-(25,50,78,100, auto)</code>	Utility
<code>.invalid-feedback</code>	 A form with several input fields. The 'City' field is highlighted in red, indicating it is invalid. Below it, the text 'Please provide a valid city' is displayed. The 'State' field is also highlighted in red, with the text 'Please provide a valid state' below it. The 'Zip' field is highlighted in red, with the text 'Please provide a valid zip' below it.	This class can be added with server side form validation to add a feedback message to an invalid field	Forms
<code>.is-*</code>	n/a	If you do server side form validation you can use this class to set feedback colors on inputs or error message. <code>.is-(valid, invalid)</code>	Forms
<code>.justify-content-*</code>	 A series of flex containers with different justify-content values: flex-start, flex-end, center, space-between, and space-around.	Class specifies where the flex items will be positioned inside the container. <code>.justify-content-(sm, md, lg, xl)-(start, end, center, between, around)</code>	Utility
<code>.m*-*-*</code>	n/a	Applies margin to an element using responsive breakpoints <code>{property}{sides}-{breakpoint}-{size}</code> <code>m(t,b,r,l,x,y)-(sm, md, lg, xl)-(0, 1, 2, 3, 4, 5)</code>	Utility
<code>.p*-*-*</code>	n/a	Applies padding to an element using responsive breakpoints <code>{property}{sides}-{breakpoint}-{size}</code> <code>p(t,b,r,l,x,y)-(sm, md, lg, xl)-(0, 1, 2, 3, 4, 5)</code>	Utility
<code>.progress-bar-animated</code>	 A progress bar with a blue fill and a white border. The fill is animated.	When this class is added to a progressbar the progress will be animated using css3 animations	Progress
<code>.nav-fill</code>	 A navigation bar with three items: 'Active', 'Longer nav link', and 'Link'. The 'Active' item is highlighted in blue.	Makes all nav items use all available horizontal space. Nav items are different widths based on their content.	Navs
<code>.nav-justified</code>	 A navigation bar with three items: 'Active', 'Longer nav link', and 'Link'. All items are the same width and use all available horizontal space.	Makes all nav items equal width and use all available horizontal space.	Navs
<code>.navbar-collapse</code>	n/a	The nav links that are collapsed and shown when toggled on mobile widths.	Navbar
<code>.navbar-expand-*</code>	n/a	Since the navbar is displayed collapse on mobile first, this class specifies what breakpoint you want the navbar to not be collapsed	Navbar









Class Name	Preview	Description	Category
<code>.navbar-text</code>	n/a	Vertically centers text inside a navbar	Navbar
<code>.navbar-toggler-icon</code>		The cheeseburger navigation icon is set using an svg background image of three horizontal lines	Navbar
<code>.no-gutters</code>	n/a	Removes the negative margin on the <code>.row</code> and padding from the child columns. Helpful when you want an image to expand to the edges of the browser without padding on the left and right edges.	Grid
<code>.order-*-*</code>		This class is used to control how the elements are ordered on the page regardless of their order in the source code. So you can rearrange your layout as needed.	Grid
<code>.rounded-*</code>		The <code>.img-rounded</code> class was renamed to this and is primarily used with images. However, the class just adds a border radius so you could use this on other elements that you would like a radius applied.	Images
<code>.visible</code>	n/a	Hides the visibility of an element but does not change their display property.	Utility
<code>.w-*</code>		Width utility class that makes the element a percentage width of its parent element. <code>w-(25,50,78,100, auto)</code>	Utility
<code>.was-validated</code>		This class is set by Bootstrap's javascript to apply sub class validation styles to the form inputs.	Forms
<code>.alert-heading</code>		This class is added to headings inside alerts. It applies <code>color:inherit</code> so the colors match.	Alerts
<code>.blockquote</code>		Add to blockquote elements to apply the proper spacing and bottom margin to separate it from other text.	Blockquotes
<code>.blockquote-footer</code>		Wrapping class for citation text underneath a blockquote. Used to lighten the text color.	Blockquotes
<code>.btn-group-lg</code>		Increases the default button group size	Button Group
<code>.btn-group-sm</code>		Decreases the default button group size	Button Group





Class Name	Preview	Description	Category
<code>.btn-group-</code> <code>toggle</code>		This class replaces an input checkbox with a custom style that is toggable on click	Button Group
<code>.btn-lg</code>		Increases the default button size	Buttons
<code>.btn-outline-*</code>		Transparent background with colored text and border (danger info primary secondary success warning)	Buttons
<code>.card</code>		The class added to the div that wraps each individual card	Cards
<code>.card-body</code>		This class is added to the first child div inside the div.card parent	Cards
<code>.card-columns</code>		The .card-columns class is added to the wrapping div of of masonry-like collection of cards	Cards
<code>.card-*</code>		First add .card-inverse and then add one of the contextual background colors (danger info primary secondary success warning)	Cards
<code>.card-deck</code>		Similar to columns Bootstrap card decks are equal height and width	Cards
<code>.card-footer</code>		Wrap class for a card footer content area	Cards
<code>.card-group</code>		The parent wrapping class around a group of cards. Groups are similar to decks but they have no margin between each card.	Cards

Class Name	Preview	Description	Category
<code>.card-header</code>	 A card header preview showing a title 'Special title treatment', a subtitle 'With supporting text below as a natural lead-in to additional content.', a 'Go somewhere' button, and a timestamp '2 days ago'.	Wrap class for a card header content area	Cards
<code>.card-header-pills</code>		Class added in combination with <code>.nav-pills</code> to add pill navigation to a card header	Cards
<code>.card-header-tabs</code>		Class added in combination with <code>.nav-pills</code> to add tab navigation to a card header	Cards
<code>.card-img</code>		Add this class to the image you would like to have as a card background image. Used with creating cards with image overlays.	Cards
<code>.card-img-bottom</code>	 A card footer preview showing a title 'Card title', a subtitle 'This is a wider card with supporting text below as a natural lead-in to additional content. This content is a little bit longer.', a timestamp 'Last updated 3 mins ago', and a large image placeholder labeled '318x180'.	Similar to a card footer you can cap the bottom of a card with an image	Cards
<code>.card-img-overlay</code>	 A card image overlay preview showing a title 'Card title', a subtitle 'This is a wider card with supporting text below as a natural lead-in to additional content. This content is a little bit longer.', and a large image placeholder labeled '318x270'.	Wrapper class used to create a card that has a background image overlay	Cards
<code>.card-img-top</code>	 A card header preview showing a large image placeholder labeled '318x180', a title 'Card title', a subtitle 'This is a wider card with supporting text below as a natural lead-in to additional content. This content is a little bit longer.', and a timestamp 'Last updated 3 mins ago'.	Similar to a card header you can cap the top of a card with an image	Cards
<code>.card-inverse</code>	 A card inverse preview showing a title 'Special title treatment', a subtitle 'With supporting text below as a natural lead-in to additional content.', a 'Go somewhere' button, and a timestamp '2 days ago'.	Inverts the default colors to use light text on a dark background color	Cards





Class Name	Preview	Description	Category
<code>.card-link</code>	 A card preview showing a dark grey header with 'Image cap', a title 'Card title', and several paragraphs of placeholder text. At the bottom, there are two links: 'Card link' and 'Another link', both with the .card-link class applied.	Adds spacing around links added inside cards	Cards
<code>.card-subtitle</code>	 A card preview showing a title 'Card title', a subtitle 'Support card subtitle' with a red arrow pointing to it indicating the .card-subtitle class, an 'Image' placeholder, and a paragraph of text. At the bottom, there are two links: 'Card link' and 'Another link'.	Class added to card subtitles that adjusts the default heading styles	Cards
<code>.card-text</code>	 A card preview showing a 'Special title', a paragraph of text with a blue highlight indicating the .card-text class, and a 'Go somewhere' button.	This class wraps the container around card text	Cards
<code>.card-title</code>	 A card preview showing a dark grey header with '318x180', a title 'Card title' with a blue highlight indicating the .card-title class, a paragraph of text, and a 'Go somewhere' button.	The class added to titles inside cards. It applies the proper spacing.	Cards
<code>.carousel-item</code>	 A blue rectangular slide with the text 'Third slide' in the center, representing a .carousel-item.	The wrapper class applied to each individual carousel item	Carousel
<code>.clearfix</code>	n/a	Clears the floats of any child elements. Add this class to the parent element wrapping the floating elements.	Utility
<code>.col-form-label</code>		Class added to form labels to apply consistent padding and margins	Forms
<code>.col-form-label-lg</code>		Increases the font size and spacing of a form label	Forms



Class Name	Preview	Description	Category
<code>.col-form-label-sm</code>		Decreases the font size and spacing of a form label	Forms
<code>.col-xl-*</code>	n/a	Set column width for anything greater than 1200px. Specify the column span by adding 1-12 at the end	Grid system
<code>.custom-checkbox</code>		Parent class that converts a default form checkbox into a custom HTML/CSS checkbox	Forms
<code>.custom-control</code>	n/a	Used on all custom form inputs and adds base styles like padding and display:inline	Forms
<code>.custom-control-inline</code>		Custom form checkboxes are set to be display:block. Use this class to make the checkbox inline	Forms
<code>.custom-control-input</code>	n/a	This class is added to the default input that is going to be replaced. It adds the following: position: absolute; z-index: -1; opacity: 0;	Forms
<code>.custom-control-label</code>		When creating a custom form checkbox, this class replaces the default checkbox with custom elements using :before and :after	Forms
<code>.custom-file</code>		Class added to a label of grouped elements to create a custom file upload input	Forms
<code>.custom-file-control</code>		Similar to the custom-control-indicator class this class is added to a div to build a custom file input using CSS :before and :after.	Forms
<code>.custom-file-input</code>	n/a	This class is added to the default input type="file" and hides it using CSS	Forms
<code>.custom-file-label</code>		When creating a custom form file browser, this class replaces the default file browser with custom elements using :after	Forms
<code>.custom-radio</code>		This class is added to the parent label tag along with .custom-control class to specify what kind of custom input it will be	Forms



Class Name	Preview	Description	Category
<code>.custom-select</code>		Class added to a select tag to create a custom select menu	Forms
<code>.custom-select-sm</code>		Decreases the font size and padding on a custom select	Forms
<code>.custom-select-lg</code>		Increases the relative size of a custom form select	Forms
<code>.d-*</code>		Append the following to change the element display property (block, inline, inline-block)	Utility
<code>.disabled</code>		Add this class to anchor tags to disable the click functionality but still have them visible.	Buttons
<code>.display-*</code>		This set of classes increases the font size of headings in 4 stages. These classes are used for headings outside of the main content of the page like jumbotrons and page headers. Append (1-4) to the end to adjust size.	Typography
<code>.dropdown-divider</code>		Class adds a horizontal line between dropdown link items	Dropdowns
<code>.dropdown-item</code>		This class is added to each link item shown in a dropdown menu	Dropdowns
<code>.dropdown-item-text</code>	n/a	Removes the interactivity from a dropdown so it does not appear clickable	Dropdowns
<code>.dropdown-toggle-split</code>		Class added to the notched dropdown navigation. Great for providing additional actions but still having a primary action.	Dropdowns
<code>.dropleft</code>		Dropdown menu that opens left of the button	Dropdowns
<code>.dropright</code>		Dropdown menu that opens right of the button	Dropdowns







Class Name	Preview	Description	Category
<code>.dropup</code>		Displays the dropdown menu above the button instead of below.	Dropdowns
<code>.embed-responsive-*</code>	n/a	Class used to adjust responsive embed aspect ratio. Append one of the following for the desired aspect ratio (21by9, 16by9, 4by3, 1by1)	Utility
<code>.embed-responsive-item</code>	n/a	By default responsive embeds apply to iframe, object, embed, and video tags. You can add <code>.embed-responsive-item</code> to any other element to have the same responsive styles applied	Utility
<code>.figure-caption</code>		Added to a figure figcaption element to apply font styling	Content
<code>.figure-img</code>		Classed added to images inside a figure to apply some margin	Content
<code>.font-*</code>	Bold text. Normal weight text. <i>Italic text.</i>	(italic, weight-bold, weight-light, weight-normal, monospace)	Utility
<code>.form-check</code>		The parent class of form checkboxes	Forms
<code>.form-check-inline</code>	☐ 1 ☐ 2 ☐ 3	Class used for a horizontal group of checkmarks or radio buttons	Forms
<code>.form-check-input</code>		This class is added to the input tag for checkboxes and radio buttons. Adds styles for positioning and margins.	Forms
<code>.form-check-label</code>		This class is added to checkbox and radio button labels	Forms
<code>.form-control-file</code>		The class added to input type="file" to apply font and spacing	Forms


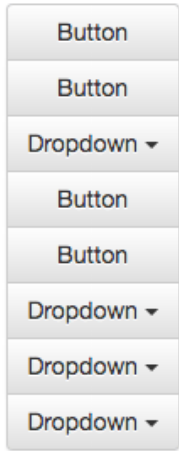
Class Name	Preview	Description	Category
<code>.form-control-*</code>		Apply this class to form elements to increase or decrease its size relative to the default sizing <code>.form-control-(lg, sm)</code>	Forms
<code>.form-inline</code>		Use this class to have a series of labels and form elements on a single horizontal row	Forms
<code>.form-text</code>		This class is used for help text alongside form elements. You can add <code>.text-muted</code> to make the text lighter in color	Forms
<code>.has-*</code>		The <code>.has-(success, warning, danger)</code> is added to the parent form element container to apply visual feedback to the user on form validation.	Forms
<code>.img-fluid</code>		This class is applied to images you would like to be responsive or fluid width across various screen sizes. This was <code>.img-responsive</code> in v3	Images
<code>.input-group-*</code>		This class lets you extend form controls by adding text or buttons to the left or right of the input. <code>.input-group-(addon btn)</code>	Input Group
<code>.input-group-append</code>		This class adds <code>margin-left: -1px;</code> to the input set to left of the group to compensate for the 1px border	Input Group
<code>.input-group-prepend</code>		This class adds <code>margin-right: -1px;</code> to the input set to right of the group to compensate for the 1px border	Input Group

Class Name	Preview	Description	Category
.input-group-text		This class adds the background color and text styles to the text inside an input group	Forms
.jumbotron-fluid		A default jumbotron is not full width but adding this class removes the rounded corners and makes it extend to 100% of its parent	Jumbotron
.list-group-flush		When adding a list group to a card add this class to the list group to remove the border. Otherwise you will have a double border.	Cards
.list-group-item-action		Add this class to each anchor in a list-group to remove the default anchor text color	List Group
.list-inline		Change ul or ol list to be listed horizontally with a little margin between each li	Typography
.m*-*#		Sometimes you need to add some margin or padding to element without writing a custom CSS selector. Set margin or padding, the side to apply the spacing, and lastly the size of the spacing (m,p)-(t r b l x y a)-(0,1,2,1.5,3)	Utility
.media-bottom		Add this class the div wrapping the media object image to align it to the bottom	Media Object
.media-left		Add this class the div wrapping the media object image to align it to the left	Media Object
.media-middle		Add this class the div wrapping the media object image to center it vertically	Media Object
.media-right		Add this class the div wrapping the media object image to align it to the right	Media Object




Class Name	Preview	Description	Category
<code>.nav-item</code>		If your nav uses a list add this class to each list item for the proper spacing	Navs
<code>.nav-link</code>		Each anchor link inside your nav is given this class in order to have the proper styling	Navs
<code>.nav-pills</code>		Use this class along with <code>.nav</code> to make each nav link into a button	Navs
<code>.navbar-light</code>		Add this class to your navbar if you would like it to have a light background and dark text	Navbar
<code>.navbar-toggler</code>		The infamous cheeseburger icon to signify a navigation menu on mobile	Navbar
<code>.offset-*-*</code>		Used to offset a grid column from its original position	Grid System
<code>.p*-*#</code>		Sometimes you need to add some margin or padding to element without writing a custom CSS selector. Set margin or padding, the side to apply the spacing, and lastly the size of the spacing (m,p)-(t r b l x y a)-(0,1,2,1.5,3)	Utilities
<code>.page-item</code>		This class is added to each li inside the ul.pagination and floats the li's'	Pagination
<code>.page-link</code>		This class is added to each anchor link containing the numbers	Pagination
<code>.pagination-sm</code>		Decreases the font size and spacing of a pagination nav	Pagination
<code>.pagination-lg</code>		Increases the font size and spacing of a pagination nav	Pagination



Class Name	Preview	Description	Category
<code>.position-*</code>	N/A	Not responsive, but a group of utility classes to add common position values. <code>.position-(absolute, fixed, relative, static, sticky)</code>	Utilities
<code>.shadow-*</code>		Adds a black CSS box shadow to an element. <code>.shadow-(none, sm, lg)</code>	Utility
<code>.pos-f-t</code>	n/a	Positions an element fixed to the top of the viewport and full width.	Utility
<code>.sr-only</code>	n/a	Hide element to all devices except screen readers	Utilities
<code>.sr-only-focusable</code>	n/a	Combine <code>.sr-only</code> with <code>.sr-only-focusable</code> to show the element again when it's focused by a user using a keyboard	Utilities
<code>.table-*</code>		Adds a 1px stroke around the rows, columns, and table outline. You can also remove the borders entirely. <code>.table-(bordered, borderless)</code>	Tables
<code>.table-*</code>		Contextual classes of different color styles to provide user feedback (<code>active danger info primary secondary success warning</code>)	Tables
<code>.table-hover</code>		Adds a background color when you hover a table row	Tables
<code>.table-reflow</code>		The table header becomes the first column of the table to the left	Tables
<code>.table-sm</code>		Removes vertical padding between table rows so it does not take as much vertical space. Good for tables with a lot of rows.	Tables


Class Name	Preview	Description	Category
<code>.table-striped</code>		Adds a light background color to every other table row for a striped effect	Tables
<code>.text-*-*</code>		Aligns text left, right or center use choose breakpoint (xs sm md lg xl) then alignment (left, right, center)	Utilities
<code>.thead-dark</code>		The default table head styling of light background and dark text	Tables
<code>.thead-light</code>		Inverts the table head to have a dark background and light text	Tables
<code>.alert</code>		The <code>.alert</code> class adds base styling with padding and margin.	Alerts
<code>.alert-*</code>		Change the color of the alert to provide user feedback. (primary, secondary, success, danger, warning, info, light, dark)	Alerts
<code>.alert-dismissible</code>		Similar to a well it is a box with a border and padding. This class and a child element with a <code>.close</code> class lets the user close the alert.	Alerts
<code>.alert-link</code>		When you add links inside alert this class matches the font color to the parent alert class.	Alerts
<code>.active</code>		Tables contextual class to change row color	Tables
<code>.bg-danger</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes
<code>.bg-info</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes
<code>.bg-primary</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes
<code>.bg-success</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes

Class Name	Preview	Description	Category
<code>.bg-warning</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes
<code>.breadcrumb</code>		Indicate the current page's location within a navigational hierarchy.	Breadcrumbs
<code>.btn</code>		This class sets the spacing and size of the button.	Buttons
<code>.btn-block</code>		By default buttons are inline this class makes it block to span the full width of its parent.	Buttons
<code>.btn-danger</code>		Defaults to a red background button	Buttons
<code>.btn-group</code>		Smushes multiple buttons together to make a pill shape. Each button is separated by a vertical line.	Button groups
<code>.btn-group-vertical</code>		Make a set of buttons appear vertically stacked rather than horizontally.	Button groups






Class Name	Preview	Description	Category
<code>.btn-info</code>		Button for information on a topic like terms and conditions. Default is light blue.	Buttons
<code>.btn-link</code>		Keeps the spacing set with the <code>.btn</code> class but removes the outer border.	Buttons
<code>.btn-lg</code>		Fancy larger or smaller buttons? Add <code>.btn-lg</code> , <code>.btn-sm</code> , or <code>.btn-xs</code> for additional sizes.	Buttons
<code>.btn-primary</code>		Use for the primary action in a set.	Buttons
<code>.btn-sm</code>		Fancy larger or smaller buttons? Add <code>.btn-lg</code> , <code>.btn-sm</code> , or <code>.btn-xs</code> for additional sizes.	Buttons
<code>.btn-success</code>		Defaults to a green background button with dark border.	Buttons
<code>.btn-toolbar</code>		Used to create a row of buttons similar pagination row	Button groups
<code>.btn-warning</code>		Defaults to a yellow background button with dark border.	Buttons
<code>.carousel</code>		parent carousel class making it position relative	Carousel
<code>.carousel-caption</code>		Caption for each slide item	Carousel

Class Name	Preview	Description	Category
<code>.carousel-indicators</code>		parent classed added to an ordered list for the little circles showing what slide you are on	Carousel
<code>.carousel-inner</code>		The div wrapper that contains the carousel slide items	Carousel
<code>.close</code>		Use the generic close icon for dismissing content like modals and alerts.	Helper Classes
<code>.col-*-*</code>		span 1-12 column. Extra small devices Phones (< 768px), Small devices Tablets (≥768px), Medium devices Desktops (≥992px), Large devices Desktops (≥1200px). Column device Column numeric values can be 1-12.	Grid system
<code>.col-*-pull-*</code>		Easily change the order of our built-in grid columns with <code>.col-*-push-*</code> and <code>.col-*-pull-*</code> modifier classes. Pull numeric values can be 0-12.	Grid system
<code>.col-*-push-*</code>		Easily change the order of our built-in grid columns with <code>.col-*-push-*</code> and <code>.col-*-pull-*</code> modifier classes. Push numeric values can be 0-12.	Grid system
<code>.collapse</code>		hides content on hide and show component	Collapse
<code>.collapsing</code>		applied during transitions on hide and show component	Collapse
<code>.container</code>		Fixed width container with widths determined by screen sites. Equal margin on the left and right.	Grid system
<code>.container-fluid</code>		Spans the full width of the screen	Grid system
<code>.dropdown</code>		This class gives you the ability to add a dropdown to navbar, tabs, and pills so you can display a dropdown of additional navigation.	Dropdowns

Class Name	Preview	Description	Category
<code>.dropdown-header</code>		Used to add headers inside the dropdown menu	Dropdown
<code>.dropdown-menu</code>		Adds the default styles for the dropdown menu container	Dropdown
<code>.dropdown-toggle</code>		This class is added to the button that will have the toggle action applied that will hide and show the dropdown menu	Dropdown
<code>.embed-responsive</code>		The default responsive iframe embed styles	Embed
<code>.embed-responsive-16by9</code>		Div wrapper class to make child iframe responsive	Embed
<code>.embed-responsive-4by3</code>		Div wrapper class to make child iframe responsive	Embed
<code>.fade</code>		To have your alerts use animation when closing, make sure they have the <code>.fade</code> and <code>.in</code> classes already applied to them.	Alerts
<code>.form-control</code>		Class added input, textarea, and select to make them 100% and responsive	Forms
<code>.form-group</code>		A div wrapper class that goes around a form input and label	Forms
<code>.h1 - .h6</code>		Apply heading styles to other elements. Make a paragraph look like an h1	Typography

Class Name	Preview	Description	Category
.img-thumbnail		Adds rounded corners and an inset border to an image	Images
.info		Tables contextual class to change row color" target="_blank" href="https://getbootstrap.com/docs/4.1/content/tables/#contextual-classes	Tables
.initialism		Add .initialism to an abbreviation for a slightly smaller font-size.	Typography
.input-group		Wrapper class used to enhance an input and label group by adding a button in front or behind as help text	Input groups
.invisible	<pre>// Classes .show { display: block !important; } .hidden { display: none !important; } .invisible { visibility: hidden; }</pre>	Make something invisible	Helper Classes
.jumbotron		A content section that is used to showcase important content. Commonly used on home pages and category pages.	Jumbotron
.lead	Vivamus magna justo, lacinia eget consectetur sed, convallis at tellus. Pellentesque dapibus efficitur laoreet. Nam risus ante, dapibus a molestie consequat, ultrices ac magna. Fusce dui lectus, congue vel laoreet lacinia nec. Morbi nibh, viverra non orci. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Donec velit neque auctor turpis. Lorem ipsum dolor sit amet, consectetur adipiscing elit.	Increase the font size and line height of a paragraph. Good to use on the first paragraph of an article to improve readability.	Typography
.list-group		Wrapper ul class that contains li with borders	List group
.list-group-item		Class added to each li in a list-group	List group
.list-group-item-text		Class added to an anchor or p for a .list-group-item text under a heading	List group
.list-group-item-*		Change color of list group item by adding one of the following: default, warning, info, danger, primary	List group
.list-inline	Lorem ipsum Phasellus iaculis Nulla volutpat	Overrides a lists default style to be inline and block	Typography

Class Name	Preview	Description	Category
<code>.list-unstyled</code>	Lorem ipsum dolor sit amet Consectetur adipiscing elit Integer molestie lorem at massa Facilisis in pretium nisl aliquet Nulla volutpat aliquam velit - Phasellus iaculis neque - Purus sodales ultricies - Vestibulum laoreet porttitor sem - Ac tristique libero volutpat at Faucibus porta lacus fringilla vel Aenean sit amet erat nunc Eget porttitor lorem	Removes all bullet styling from a ul or ol list	Typography
<code>.mark</code>	You can use the mark tag to highlight text.	For highlighting a run of text due to its relevance in another context, use the mark tag.	Typography
<code>.media</code>	Media heading Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at est. Integer molestie lorem at massa. Media body Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at est. Integer molestie lorem at massa.	Media components are image heading and description text items. Blog comments, portfolio projects, album covers, etc.	Media object
<code>.media-body</code>	Media body Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at est. Integer molestie lorem at massa.	The class added for the media description copy block	Media object
<code>.modal</code>	Optional sizes Modals have four optional sizes, available via modifier classes to be placed on a <code>.modal</code> to control their size. Default Small Large Fullscreen	The parent wrapper class of modal content	Modal
<code>.modal-backdrop</code>		Added by the modal javascript to make the area around the modal clickable to hide the modal	Modal
<code>.modal-body</code>	Modal body Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at est. Integer molestie lorem at massa.	The modal body content class : Header - Body - Footer	Modal
<code>.modal-content</code>	Modal content Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at est. Integer molestie lorem at massa.	modal-content contains modal-body, modal-header, and modal-footer	Modal
<code>.modal-dialog</code>	Modal dialog Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at est. Integer molestie lorem at massa.	The secondary wrapper class of the entire modal content	Modal
<code>.modal-dialog-centered</code>	Modal dialog centered Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at est. Integer molestie lorem at massa.	Vertically and horizontally centers a modal dialog	Modal
<code>.modal-footer</code>	Modal footer Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at est. Integer molestie lorem at massa.	The footer of the modal that contains action buttons or help text	Modal
<code>.modal-header</code>	Modal header Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at est. Integer molestie lorem at massa.	The header section of the modal that contains the title and close button	Modal
<code>.modal-lg</code>	Optional sizes Modals have four optional sizes, available via modifier classes to be placed on a <code>.modal</code> to control their size. Default Small Large Fullscreen	Makes a modal wider	Modal

Class Name	Preview	Description	Category
<code>.modal-open</code>		Javascript adds this class to the body tag to prevent scrolling with the modal is open	Modal
<code>.modal-sm</code>		Makes the modal not as wide	Modal
<code>.modal-title</code>		The title of the modal	Modal
<code>.nav</code>		nav base class added all types of navigation: tabs, pills, justified, disabled links	Navs
<code>.nav-tabs</code>		Class added to enable Bootstrap tabs	Tab
<code>.navbar</code>		Navigation header class	Navbar
<code>.navbar-brand</code>		Most navbars contain a logo or brand. This class is added to the anchor	Navbar
<code>.navbar-nav</code>		The wrapper class of the navigation elements excluding the brand	Navbar
<code>.next</code>		Used in the carousel control to identity the next control	Carousel
<code>.pagination</code>		The wrapper class that contains all of the page navigation	Pagination
<code>.pre-scrollable</code>		You may optionally add the .pre-scrollable class, which will set a max-height of 350px and provide a y-axis scrollbar.	Code
<code>.progress</code>		The parent class wrapper of a progress bar	Progress bars
<code>.progress-bar</code>		The class applied to the progress bar graphic that moves	Progress bars
<code>.progress-bar-striped</code>		Changes progress to a striped version	Progress bars
<code>.row</code>		used a parent wrapper of any vertical columns	Grid system
<code>.small</code>		Create lighter, secondary text in any heading with a generic tag or the .small class.	Typography

Class Name	Preview	Description	Category
<code>.sr-only</code>		Hide an element to all devices except screen readers with <code>.sr-only</code> .	Helper Classes
<code>.success</code>		Tables contextual class to change row color	Tables
<code>.tab-pane</code>		Class added to the div that will act as a tab content area	Tab
<code>.table</code>		Adding this class to a HTML table applies the Bootstrap styles	Tables
<code>.table-sm</code>		Removes some padding from the table cells	Tables
<code>.table-bordered</code>		Adds borders to a table and its cells	Tables
<code>.table-responsive-*</code>		Makes a table responsive by cropping a wide table and makes it scrollable horizontally. <code>.table-responsive</code> or <code>.table-responsive-(lg, md, sm, xl)</code>	Tables
<code>.text-capitalize</code>		Capitalize the text or title case	Typograp hy
<code>.text-justify</code>		Full justifies the text	Typograp hy
<code>.text-lowercase</code>		Changes text to lowercase	Typograp hy
<code>.text-nowrap</code>		Prevents the text from wrapping	Typograp hy
<code>.text-*</code>		Changes text color to a contextual color or grayscale value <code>.text-(primary, secondary, success, danger, warning, info, light, dark, body, muted, white, black-50, white-50)</code>	Color
<code>.text-uppercase</code>		Makes text uppercase	Typograp hy
<code>.tooltip</code>		This class is used by the tooltip javascript as the wrapper of the tooltip	Tooltip
<code>.tooltip-inner</code>		The wrapper class of tooltip text. This is generated by the Bootstrap javascript Some tooltip text!	Tooltip

