













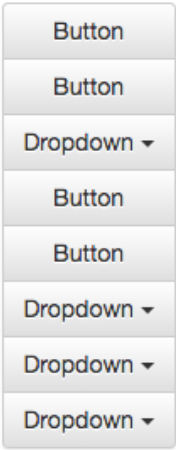


Bootstrap 3 Classes List with Description v3.3.7






Complete list of all Bootstrap classes with description, examples, and links to documentation.






Class Name	Preview	Description	Category
<code>.affix</code>		The affix plugin toggles position: fixed; on and off, emulating the effect found with position: sticky;. The sub navigation on the right is a live demo of the affix plugin.	Affix
<code>.alert</code>		Similar to a well it is a box with a border and padding. The .alert class adds the padding and margin.	Alerts
<code>.alert-danger</code>		Similar to a well it is a box with a border and padding. The .alert class adds the padding and margin. Defaults as red background color.	Alerts
<code>.alert-</code> <code>dismissible</code>		Similar to a well it is a box with a border and padding. This class and a child element with a .close class lets the user close the alert.	Alerts
<code>.alert-info</code>		Similar to a well it is a box with a border and padding. The .alert class adds the padding and margin. Defaults as blue background color.	Alerts
<code>.alert-link</code>		When you add links inside alert this class matches the font color to the parent alert class.	Alerts
<code>.alert-success</code>		Similar to a well it is a box with a border and padding. The .alert class adds the padding and margin. Defaults as green background color.	Alerts
<code>.alert-warning</code>		Similar to a well it is a box with a border and padding. The .alert class adds the padding and margin. Defaults as yellow background color.	Alerts
<code>.active</code>		Tables contextual class to change row color	Tables
<code>.arrow</code>		popover option - .arrow will become the popover's arrow.	Popover
<code>.dl-horizontal</code>		Makes terms and definitions line up with a center gutter	Lists
<code>.badge</code>		Used to show new or unread messages or items like the iOS red icon showing new messages or email.	Badges




Class Name	Preview	Description	Category
<code>.bg-danger</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes
<code>.bg-info</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes
<code>.bg-primary</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes
<code>.bg-success</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes
<code>.bg-warning</code>		Similar to the contextual text color classes, easily set the background of an element to any contextual class. Anchor components will darken on hover, just like the text classes.	Helper Classes
<code>.breadcrumb</code>		Indicate the current page's location within a navigational hierarchy.	Breadcrumbs
<code>.btn</code>		This class sets the spacing and size of the button.	Buttons
<code>.btn-block</code>		By default buttons are inline this class makes it block to span the full width of its parent.	Buttons
<code>.btn-danger</code>		Defaults to a red background button	Buttons
<code>.btn-default</code>		Defaults to a white background button with dark border.	Buttons
<code>.btn-group</code>		Smushes multiple buttons together to make a pill shape. Each button is separated by a vertical line.	Button groups
<code>.btn-group-justified</code>		Make a group of buttons stretch at equal sizes to span the entire width of its parent. Also works with button dropdowns within the button group.	Button groups

Class Name	Preview	Description	Category
.btn-group-vertical		Make a set of buttons appear vertically stacked rather than horizontally.	Button groups
.btn-info		Button for information on a topic like terms and conditions. Default is light blue.	Buttons
.btn-link		Keeps the spacing set with the .btn class but removes the outer border.	Buttons
.btn-lg		Fancy larger or smaller buttons? Add .btn-lg, .btn-sm, or .btn-xs for additional sizes.	Buttons
.btn-primary		Use for the primary action in a set.	Buttons
.btn-sm		Fancy larger or smaller buttons? Add .btn-lg, .btn-sm, or .btn-xs for additional sizes.	Buttons
.btn-success		Defaults to a green background button with dark border.	Buttons
.btn-toolbar		Used to create a row of buttons similar pagination row	Button groups
.btn-warning		Defaults to a yellow background button with dark border.	Buttons
.btn-xs		Fancy larger or smaller buttons? Add .btn-lg, .btn-sm, or .btn-xs for additional sizes.	Buttons




Class Name	Preview	Description	Category
.caption	242x200 Thumbnail label Orae justo odio, dapibus ac facilisis in, egestas eget quam. Donec id elit non mi porta gravida at eget metus. Nullam id dolor id nibh ultricies vehicula ut id elit. ButtonButton	thumbnail caption but could be used elsewhere	Thumbnails
.caret		Used in dropdown menus to show open and closed states	Dropdowns
.carousel	<First slide>	parent carousel class making it position relative	Carousel
.carousel-caption	<Third slide label>	Caption for each slide item	Carousel
.carousel-control	<Third slide label>	Added to each next and previous anchors	Carousel
.carousel-indicators	<Third slide>	parent classed added to an ordered list for the little circles showing what slide you are on	Carousel
.carousel-inner	<Third slide label>	The div wrapper that contains the carousel slide items	Carousel
.center-block	// Class .center-block { display: block; margin-left: auto; margin-right: auto; }	add width and height to center a block level element	Helper Classes
.checkbox	Orae justo odio, dapibus ac facilisis in, egestas eget quam. Donec id elit non mi porta gravida at eget metus. Nullam id dolor id nibh ultricies vehicula ut id elit.	form checkbox wrapper - Checkboxes are for selecting one or several options in a list, while radios are for selecting one option from many.	Forms
.checkbox-inline	Orae justo odio, dapibus ac facilisis in, egestas eget quam. Donec id elit non mi porta gravida at eget metus. Nullam id dolor id nibh ultricies vehicula ut id elit.	Checkboxes are for selecting one or several options in a list, while radios are for selecting one option from many.	Forms

Class Name	Preview	Description	Category
<code>.clearfix</code>		Used to clear floats by adding <code>.cleafix</code> to the parent element. It adds a pseudo element with <code>clear:both</code> property.	Helper Classes
<code>.close</code>		Use the generic close icon for dismissing content like modals and alerts.	Helper Classes
<code>.col-*-*</code>		span 1-12 column. Extra small devices Phones (< 768px), Small devices Tablets (≥768px), Medium devices Desktops (≥992px), Large devices Desktops (≥1200px). Column device Column numeric values can be 1-12.	Grid system
<code>.col-*-offset-*</code>		Move columns to the right using <code>.col-lg-offset-*</code> classes. These classes increase the left margin of a column by * columns. For example, <code>.col-lg-offset-4</code> moves <code>.col-lg-4</code> over four columns. Offset numeric values can be 0-12	Grid system
<code>.col-*-pull-*</code>		Easily change the order of our built-in grid columns with <code>.col-*-push-*</code> and <code>.col-*-pull-*</code> modifier classes. Pull numeric values can be 0-12.	Grid system
<code>.col-*-push-*</code>		Easily change the order of our built-in grid columns with <code>.col-*-push-*</code> and <code>.col-*-pull-*</code> modifier classes. Push numeric values can be 0-12.	Grid system
<code>.collapse</code>		hides content on hide and show component	Collapse
<code>.collapsing</code>		applied during transitions on hide and show component	Collapse
<code>.container</code>		Fixed width container with widths determined by screen sites. Equal margin on the left and right.	Grid system
<code>.container-fluid</code>		Spans the full width of the screen	Grid system
<code>.control-label</code>		In forms this classes is added to form labels to allow the label to be used for form validation	Forms
<code>.danger</code>		Tables contextual class to change row color	Tables


Class Name	Preview	Description	Category
<code>.divider</code>		Used to separate links in dropdown menus a	Dropdowns
<code>.dropdown</code>		This class gives you the ability to add a dropdown to navbar, tabs, and pills so you can display a dropdown of additional navigation.	Dropdowns
<code>.dropdown-backdrop</code>		On mobile devices, opening a dropdown adds a <code>.dropdown-backdrop</code> as a tap area for closing dropdown menus when tapping outside the menu, a requirement for proper iOS support. This means that switching from an open dropdown menu to a different dropdown menu requires an extra tap on mobile.	Dropdown
<code>.dropdown-header</code>		Used to add headers inside the dropdown menu	Dropdown
<code>.dropdown-menu</code>		Adds the default styles for the dropdown menu container	Dropdown
<code>.dropdown-toggle</code>		This class is added to the button that will have the toggle action applied that will hide and show the dropdown menu	Dropdown
<code>.dropup</code>		Add this class to change the orientation of the dropdown menu to pop up instead of down	Dropdown
<code>.embed-responsive</code>		The default responsive iframe embed styles	Responsive embed
<code>.embed-responsive-16by9</code>		Div wrapper class to make child iframe responsive	Responsive embed
<code>.embed-responsive-4by3</code>		Div wrapper class to make child iframe responsive	Responsive embed







Class Name	Preview	Description	Category
<code>.fade</code>		To have your alerts use animation when closing, make sure they have the <code>.fade</code> and <code>.in</code> classes already applied to them.	Alert
<code>.form-control</code>		Class added input, textarea, and select to make them 100% and responsive	Forms
<code>.form-control-feedback</code>		A form validation class	Forms
<code>.form-control-static</code>		Lets you add plain text to the right of a label. For example, Email label could have help text	Forms
<code>.form-group</code>		A div wrapper class that goes around a form input and label	Forms
<code>.glyphicon</code>		Base icon font styling for icon font	Glyphicons
<code>.glyphicon-chevron-left</code>		Class to add chevron icon to the right	Glyphicons
<code>.glyphicon-chevron-right</code>		Class to add chevron icon to the right	Glyphicons
<code>.h1 - .h6</code>		Apply heading styles to other elements. Make a paragraph look like an h1	Typography
<code>.has-feedback</code>		You can also add optional feedback icons with the addition of <code>.has-feedback</code> and the right icon.	Forms










Class Name	Preview	Description	Category
<code>.help-block</code>	File input Choose File No file chosen Example block-level help text here. ☐ Check me out Submit	A block of help text that breaks onto a new line and may extend beyond one line.	Forms
<code>.hidden</code>	<pre>// Classes .show { display: block !important; } .hidden { display: none !important; } .invisible { visibility: hidden; }</pre>	hides an element everywhere	Helper Classes
<code>.hidden-*</code>		Use a single or combination of the available classes for toggling content across viewport breakpoints. Can us lg, md, sm. xs	Responsive Utilities
<code>.hidden-print</code>		Similar to the regular responsive classes, use these for toggling content for print.	Responsive Utilities
<code>.hide</code>	<pre>// Classes .show { display: block !important; } .hidden { display: none !important; } .invisible { visibility: hidden; }</pre>	this class is the same as hidden but is deprecated so use <code>.hidden</code> instead	Helper Classes
<code>.icon-bar</code>		Used in the navbar to make the cheeseburger mobile menu	Navbar
<code>.icon-next</code>		Glyphicon icons not necessary - The <code>.glyphicon</code> <code>.glyphicon-chevron-left</code> and <code>.glyphicon</code> <code>.glyphicon-chevron-right</code> classes are not necessarily needed for the controls. Bootstrap provides <code>.icon-prev</code> and <code>.icon-next</code> as plain unicode alternatives.	Carousel
<code>.icon-prev</code>		Glyphicon icons not necessary - The <code>.glyphicon</code> <code>.glyphicon-chevron-left</code> and <code>.glyphicon</code> <code>.glyphicon-chevron-right</code> classes are not necessarily needed for the controls. Bootstrap provides <code>.icon-prev</code> and <code>.icon-next</code> as plain unicode alternatives.	Carousel
<code>.img-circle</code>		Crops an image to be a circle	Images
<code>.img-rounded</code>		Adds rounded corners to an image	Images




Class Name	Preview	Description	Category
<code>.img-thumbnail</code>		Adds rounded corners and an inset border to an image	Images
<code>.in</code>		To make tabs fade in, add <code>.fade</code> to each <code>.tab-pane</code> . The first tab pane must also have <code>.in</code> to make the initial content visible.	Tab
<code>.info</code>		Tables contextual class to change row color" target="_blank" href="http://getbootstrap.com/css/#tables-contextual-classes	Tables
<code>.initialism</code>	HTML is the best thing since sliced bread.	Add <code>.initialism</code> to an abbreviation for a slightly smaller font-size.	Typography
<code>.input-group</code>		Wrapper class used to enhance an input and label group by adding a button in front or behind as help text	Input groups
<code>.input-group-addon</code>		The class added to an icon or help text in an form <code>.input-group</code>	Input groups
<code>.input-group-btn</code>		Attaches a button next to a text input. Would work for a search bar or email optin form.	Input groups
<code>.input-lg</code>		Set heights using classes like <code>.input-lg</code> , and set widths using grid column classes like <code>.col-lg-*</code> .	Forms
<code>.input-sm</code>		Set heights using classes like <code>.input-lg</code> , and set widths using grid column classes like <code>.col-lg-*</code> .	Forms
<code>.invisible</code>	<pre>// Classes .show { display: block !important; } .hidden { display: none !important; } .invisible { visibility: hidden; }</pre>	Make something invisible	Helper Classes
<code>.item</code>		Class added to each carousel item	Carousel
<code>.jumbotron</code>		A content section that is used to showcase important content. Commonly used on home pages and category pages.	Jumbotron



Class Name	Preview	Description	Category
.label	Example heading New Example heading New Example heading New Example heading New Example heading New	Applies default styling to labels "New"	Labels
.label-*	Default Primary Success Info Warning Danger	Change color of the label by adding one of the following: default, warning, info, danger, primary	Labels
.lead	Vivamus sagittis lacus vel augue laoreet rutrum faucibus dolor auctor. Duis mollis, est non commodo luctus.	Increase the font size and line height of a paragraph. Good to use on the first paragraph of an article to improve readability.	Typography
.left	First slide	Used to identify the left carousel control	Carousel
.list-group	One placeholder Placeholder for heading 5 Placeholder for heading 4 Placeholder for heading 3 Placeholder for heading 2 Placeholder for heading 1	Wrapper ul class that contains li with borders	List group
.list-group-item	One placeholder Placeholder for heading 5 Placeholder for heading 4 Placeholder for heading 3 Placeholder for heading 2 Placeholder for heading 1	Class added to each li in a list-group	List group
.list-group-item-heading	List group item heading Placeholder for heading 5 Placeholder for heading 4 Placeholder for heading 3 Placeholder for heading 2 Placeholder for heading 1	Class added to an anchor or p for a .list-group-item heading	List group
.list-group-item-text	List group item heading Placeholder for heading 5 Placeholder for heading 4 Placeholder for heading 3 Placeholder for heading 2 Placeholder for heading 1	Class added to an anchor or p for a .list-group-item text under a heading	List group
.list-group-item-*	Placeholder for heading 5 Placeholder for heading 4 Placeholder for heading 3 Placeholder for heading 2 Placeholder for heading 1	Change color of list group item by adding one of the following: default, warning, info, danger, primary	List group
.list-inline	Lorem ipsum Phasellus lacus Nulla volutpat	Overrides a lists default style to be inline and block	Typography
.list-unstyled	Lorem ipsum dolor sit amet Consectetur adipiscing elit Integer molestie lorem at massa Facilisis in pretium nisl aliquet Nulla volutpat aliquam velit - Phasellus iaculis neque - Purus sodales ultricies - Vestibulum laoreet porttitor sem - Ac tristique libero volutpat at Faucibus porta lacus fringilla vel Aenean sit amet erat nunc Eget porttitor lorem	Removes all bullet styling from a ul or ol list	Typography
.mark	You can use the mark tag to highlight text	For highlighting a run of text due to its relevance in another context, use the mark tag.	Typography
.media	Media heading Placeholder for heading 5 Placeholder for heading 4 Placeholder for heading 3 Placeholder for heading 2 Placeholder for heading 1	Media components are image heading and description text items. Blog comments, portfolio projects, album covers, etc.	Media object
.media-body	Media aligned media Placeholder for heading 5 Placeholder for heading 4 Placeholder for heading 3 Placeholder for heading 2 Placeholder for heading 1	The class added for the media description copy block	Media object







Class Name	Preview	Description	Category
<code>.media-heading</code>		The class applied to a heading in a media component	Media object
<code>.media-list</code>		Nested media lists would be good used as comments	Media object
<code>.media-object</code>		Class added to a media component image	Media object
<code>.modal</code>		The parent wrapper class of modal content	Modal
<code>.modal-backdrop</code>		Added by the modal javascript to make the area around the modal clickable to hide the modal	Modal
<code>.modal-body</code>		The modal body content class : Header - Body - Footer	Modal
<code>.modal-content</code>		modal-content contains modal-body, modal-header, and modal-footer	Modal
<code>.modal-dialog</code>		The secondary wrapper class of the entire modal content	Modal
<code>.modal-footer</code>		The footer of the modal that contains action buttons or help text	Modal
<code>.modal-header</code>		The header section of the modal that contains the title and close button	Modal
<code>.modal-lg</code>		Makes a modal wider	Modal
<code>.modal-open</code>		Javascript adds this class to the body tag to prevent scrolling with the modal is open	Modal
<code>.modal-sm</code>		Makes the modal not as wide	Modal
<code>.modal-title</code>		The title of the modal	Modal
<code>.nav</code>		nav base class added all types of navigation: tabs, pills, justified, disabled links	Navs
<code>.nav-justified</code>		Makes a tab navigation equal width and span the full width of its parent container	Navs







Class Name	Preview	Description	Category
<code>.nav-tabs</code>		Class added to enable Bootstrap tabs	Tab
<code>.navbar</code>		Navigation header class	Navbar
<code>.navbar-brand</code>		Most navbars contain a logo or brand. This class is added to the anchor	Navbar
<code>.navbar-btn</code>		Vertically aligns a button inside a navbar	Navbar
<code>.navbar-collapse</code>		The content inside the navbar that will be hidden with the mobile nav toggle is enabled	Navbar
<code>.navbar-default</code>		The default navbar configuration styles	Navbar
<code>.navbar-fixed-bottom</code>		Fixes the footer to the bottom of the window	Navbar
<code>.navbar-fixed-top</code>		Affixes the navbar to the top of the window	Navbar
<code>.navbar-form</code>		Wrap form elements with this class so that they are vertically center	Navbar
<code>.navbar-header</code>		This class contains the brand image or text and the mobile toggle icons	Navbar
<code>.navbar-inverse</code>		Modify the look of the navbar by inverting the colors	Navbar
<code>.navbar-left</code>		Align nav links, forms, buttons, or text, using the <code>.navbar-left</code> or <code>.navbar-right</code> utility classes. Both classes will add a CSS float in the specified direction.	Navbar
<code>.navbar-link</code>		Use the <code>.navbar-link</code> class to add the proper colors for the default and inverse navbar options.	Navbar
<code>.navbar-nav</code>		The wrapper class of the navigation elements excluding the brand	Navbar
<code>.navbar-right</code>		Align nav links, forms, buttons, or text, using the <code>.navbar-left</code> or <code>.navbar-right</code> utility classes. Both classes will add a CSS float in the specified direction.	Navbar

Class Name	Preview	Description	Category
<code>.navbar-static-top</code>		Create a full-width navbar that scrolls away with the page by adding <code>.navbar-static-top</code> and include a <code>.container</code> or <code>.container-fluid</code> to center and pad navbar content.	Navbar
<code>.navbar-text</code>		Wrap strings of text in an element with <code>.navbar-text</code> , usually on <code>atag</code> for proper leading and color.	Navbar
<code>.navbar-toggle</code>		The class the wraps the mobile toggle icon (cheeseburger icon)	Navbar
<code>.next</code>		Used in the carousel control to identify the next control	Carousel
<code>.page-header</code>		Used as a container for a page title and horizontal border for separation from the body content of a page	Page header
<code>.pager</code>		class added to a <code>ul</code> which contains <code>li</code> 's with anchors. Good for previous and next buttons	Pagination
<code>.pagination</code>		The wrapper class that contains all of the page navigation	Pagination
<code>.panel</code>		By default, all the <code>.panel</code> does is apply some basic border and padding to contain some content.	Panels
<code>.panel-body</code>		Class added to the panel body because there is also a panel heading	Panels
<code>.panel-*</code>		Change the color of the panel by adding the following: default, primary, info, warning, danger	Panels
<code>.panel-footer</code>		Class added to a panel footer	Panels
<code>.panel-group</code>		Used to group many panels together. This removes the bottom margin below each panel	Panels
<code>.panel-heading</code>		Class added to a panel heading area	Panels
<code>.panel-title</code>		Inside a <code>.panel-heading</code> you can add a <code>.panel-title</code> to adjust the styling of the text	Panels
<code>.popover</code>		A popover is similar to a tooltip but activated on click	Popover

Class Name	Preview	Description	Category
<code>.popover-content</code>		A popover is similar to a tooltip but activated on click	Popover
<code>.popover-title</code>		A popover is similar to a tooltip but activated on click	Popover
<code>.pre-scrollable</code>		You may optionally add the <code>.pre-scrollable</code> class, which will set a max-height of 350px and provide a y-axis scrollbar.	Code
<code>.prev</code>		used in the carousel component for previous link	Carousel
<code>.progress</code>		The parent class wrapper of a progress bar	Progress bars
<code>.progress-bar</code>		The class applied to the progress bar graphic that moves	Progress bars
<code>.progress-bar-danger</code>		Changes color of progress bar to danger color	Progress bars
<code>.progress-bar-info</code>		Changes color of progress bar to info color	Progress bars
<code>.progress-bar-striped</code>		Changes progress to a striped version	Progress bars
<code>.progress-bar-success</code>		Changes color of progress bar to success color	Progress bars
<code>.progress-bar-warning</code>		Changes color of progress bar to warning color	Progress bars
<code>.pull-left</code>	<pre>// Classes .pull-left { float: left !important; } .pull-right { float: right !important; }</pre>	Float element to the left	Helper Classes
<code>.pull-right</code>	<pre>// Classes .pull-left { float: left !important; } .pull-right { float: right !important; }</pre>	Float element to the right	Helper Classes

Class Name	Preview	Description	Category																			
.right		Used in the carousel	Carousel																			
.row		used a parent wrapper of any vertical columns	Grid system																			
.show	<pre>// Classes .show { display: block !important; } .hidden { display: none !important; } .invisible { visibility: hidden; }</pre>	show hidden element	Helper Classes																			
.small	Bootstrap heading Secondary text	Create lighter, secondary text in any heading with a generic tag or the .small class.	Typography																			
.sr-only		Hide an element to all devices except screen readers with .sr-only.	Helper Classes																			
.success		Tables contextual class to change row color	Tables																			
.tab-pane		Class added to the div that will act as a tab content area	Tab																			
.table	<table><tr><th colspan="3">Customer table caption</th></tr><tr><th>#</th><th>First Name</th><th>Last Name</th><th>User Name</th></tr><tr><td>1</td><td>Mark</td><td>Otto</td><td>@mdo</td></tr><tr><td>2</td><td>Jacob</td><td>Thornton</td><td>@fat</td></tr><tr><td>3</td><td>Larry</td><td>the Bird</td><td>@twitter</td></tr></table>	Customer table caption			#	First Name	Last Name	User Name	1	Mark	Otto	@mdo	2	Jacob	Thornton	@fat	3	Larry	the Bird	@twitter	Adding this class to a HTML table applies the Bootstrap styles	Tables
Customer table caption																						
#	First Name	Last Name	User Name																			
1	Mark	Otto	@mdo																			
2	Jacob	Thornton	@fat																			
3	Larry	the Bird	@twitter																			
.table-condensed	<table><tr><th>#</th><th>First Name</th><th>Last Name</th><th>User Name</th></tr><tr><td>1</td><td>Mark</td><td>Otto</td><td>@mdo</td></tr><tr><td>2</td><td>Jacob</td><td>Thornton</td><td>@fat</td></tr><tr><td>3</td><td>Larry the Bird</td><td></td><td>@twitter</td></tr></table>	#	First Name	Last Name	User Name	1	Mark	Otto	@mdo	2	Jacob	Thornton	@fat	3	Larry the Bird		@twitter	Removes some padding from the table cells	Tables			
#	First Name	Last Name	User Name																			
1	Mark	Otto	@mdo																			
2	Jacob	Thornton	@fat																			
3	Larry the Bird		@twitter																			
.table-bordered	<table><tr><th>#</th><th>First Name</th><th>Last Name</th><th>User Name</th></tr><tr><td>1</td><td>Mark</td><td>Otto</td><td>@mdo</td></tr><tr><td>2</td><td>Jacob</td><td>Thornton</td><td>@fat</td></tr><tr><td>3</td><td>Larry</td><td>the Bird</td><td>@twitter</td></tr></table>	#	First Name	Last Name	User Name	1	Mark	Otto	@mdo	2	Jacob	Thornton	@fat	3	Larry	the Bird	@twitter	Adds borders to a table and its cells	Tables			
#	First Name	Last Name	User Name																			
1	Mark	Otto	@mdo																			
2	Jacob	Thornton	@fat																			
3	Larry	the Bird	@twitter																			
.table-responsive	<table><tr><th>#</th><th>Table heading</th><th>Table heading</th><th>Table heading</th></tr><tr><td>1</td><td>Table cell</td><td>Table cell</td><td>Table cell</td></tr><tr><td>2</td><td>Table cell</td><td>Table cell</td><td>Table cell</td></tr><tr><td>3</td><td>Table cell</td><td>Table cell</td><td>Table cell</td></tr></table>	#	Table heading	Table heading	Table heading	1	Table cell	Table cell	Table cell	2	Table cell	Table cell	Table cell	3	Table cell	Table cell	Table cell	Makes a table responsive by cropping a wide table and makes it scrollable horizontally	Tables			
#	Table heading	Table heading	Table heading																			
1	Table cell	Table cell	Table cell																			
2	Table cell	Table cell	Table cell																			
3	Table cell	Table cell	Table cell																			
.table-striped	<table><tr><th>#</th><th>First Name</th><th>Last Name</th></tr><tr><td>1</td><td>Mark</td><td>Otto</td></tr><tr><td>2</td><td>Jacob</td><td>Thornton</td></tr><tr><td>3</td><td>Larry</td><td>the Bird</td></tr></table>	#	First Name	Last Name	1	Mark	Otto	2	Jacob	Thornton	3	Larry	the Bird	Zebra stripes the odd table rows. All odd rows are given a background color of #f9f9f9.	Tables							
#	First Name	Last Name																				
1	Mark	Otto																				
2	Jacob	Thornton																				
3	Larry	the Bird																				
.text-capitalize	lowercased text. UPPERCASED TEXT. Capitalized Text.	Capitalize the text or title case	Typography																			
.text-center	Left aligned text. Center aligned text. Right aligned text.	Aligns the text to the center	Typography																			
.text-danger	Donec ullamcorper nulla non metus auctor fringilla.	Changes text color to danger variable color	Typography																			

Class Name	Preview	Description	Category
<code>.text-hide</code>		hides the text - useful for replacing text with a background image	Typography
<code>.text-info</code>		Changes text color to info variable color	Typography
<code>.text-justify</code>		Full justifies the text	Typography
<code>.text-left</code>		Aligns the text to the left	Typography
<code>.text-lowercase</code>		Changes text to lowercase	Typography
<code>.text-muted</code>		Changes text color to gray	Typography
<code>.text-nowrap</code>		Prevents the text from wrapping	Typography
<code>.text-primary</code>		Changes text color to your primary color	Typography
<code>.text-right</code>		Applies text-align:right	Typography
<code>.text-success</code>		Changes text color to green or your "success" variable color	Typography
<code>.text-uppercase</code>		Makes text uppercase	Typography
<code>.text-warning</code>		Changes a text color to your default "warning" color	Typography
<code>.thumbnail</code>		display grids of images, videos, text, and more.	Thumbnails
<code>.tooltip</code>		This class is used by the tooltip javascript as the wrapper of the tooltip	Tooltip
<code>.tooltip-arrow</code>		This is the arrow pointer on tooltips that can be positioned	Tooltip
<code>.tooltip-inner</code>		The wrapper class of tooltip text. This is generated by the Bootstrap javascript Some tooltip text!	Tooltip
<code>.top</code>		Used on popovers and tooltips to show position of arrow	Tooltip

Class Name	Preview	Description	Category
.visible-*-*		Use a single or combination of the available classes for toggling content across viewport breakpoints.	Responsive Utilities
.visible-print-block		Use a single or combination of the available classes for toggling content across viewport breakpoints.	Responsive Utilities
.visible-print-inline		Use a single or combination of the available classes for toggling content across viewport breakpoints.	Responsive Utilities
.visible-print-inline-block		Use a single or combination of the available classes for toggling content across viewport breakpoints.	Responsive Utilities
.warning		Tables contextual class to change row color	Tables
.well		Wells are good for insetting some content. The default styling adds a border box and inner padding.	Wells
.well-lg		Wells are good for insetting some content. The default styling adds a border box and inner padding. This class doubles the padding.	Wells
.well-sm		Wells are good for insetting some content. The default styling adds a border box and inner padding. This class decreases the padding.	Wells